


## KINDLE ECO

Fire Rated LED Downlight  
6W, 540LM, 3 CCT, Triac Dimming



### FEATURES & BENEFITS

- Full fire rate tested 30, 60, 90 mins
- I-Joist and Web
- CCT selectable by DIP switch
- Flicker free, IP65 rated at front
- Separate junction box with loop in and loop out terminals
- White, Black, Brushed and Polished Chrome Bezel options

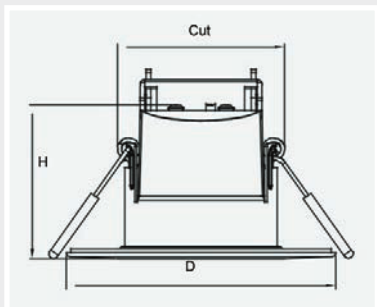


### General Information

Item No.	LUX-KINDLE-ECO
Input Power	6W
Lumen Output	540LM
Dimension	D86mmxH49mm
Hole Cutout Size	55mm
Install	Recessed
Dimming Options	Triac Dimming
Colour Finish	White
Connection Type	Junction Box with Terminals
Warranty	3 Years
IP Rating	IP65 (Front)
IK Rating	N/A
IC Rating	N/A
Approvals	CE/UKCA
Emergency Option	N/A
Microwave Sensor Option	N/A

### Photometric

Efficacy	90lm/W
Light Source	LED SMD
CCT	3000 / 4000 / 6000K
CRI	>80
Beam Angle	60°



### Electrical

Driver	Built-In
Voltage Rating	220-240V
Operating Frequency Hz	50/60Hz
Class	II
Power Factor	>0.85
Input Electrical Connections	Junction Box
Useful Life @T125° Useful Life	30,000 hours
Operating Ambient Temp.	-20° to 25° (for IC)

### Package

Inner Box Size - cm	(LxWxH) 8.8x5.5x10.5
Outer Carton Size - cm	(LxWxH) 37.5x30x23.2
Quantity Per Outer Carton - pc	40
Outer Carton Net Weight - kg	6.5
Outer Carton Gross Weight - kg	8.0
20GP Quantity - pc	43080
40FT Quantity - pc	89240