


COMET PHOTOCELL

SLIM FLOODLIGHTS WITH PHOTOCELL

The Comet floodlight offers a comprehensive range of outputs. This versatility, combined with a choice of PIR and Photocell options pre-wired cable and U shaped mounting bracket makes Comet extremely cost effective.

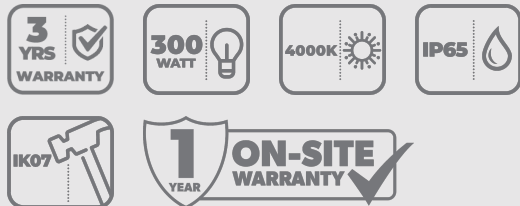

Features

- IP65
- IK07
- 3 Year Warranty
- U shaped Mounting Bracket
- Photocell Sensor



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
CMT300PC-40	Comet Floodlight 300W 30000lm 4000K IP65 Black with Photocell	30000lm		300W	100 lm/W

Product Information

Warranty	3 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Voltage	220-240V
Material (Body/Housing)	Aluminum
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra >80

Colour Finish	Black RAL9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 45°C

COMET PHOTOCELL

SLIM FLOODLIGHTS WITH PHOTOCELL

Packaging Information

Dimensions (mm)	L: 476 x W: 414 x D: 48 mm
Product Net Weight (kg)	4.36 kg
Barcode	5055807625746
Box Dimensions (mm)	L: 485 x W: 58 x D: 366 mm
Box Gross Weight (kg)	4.6 kg

Units/Outer Carton	2
Outer Carton Barcode	15055807625743
Outer Carton Dimensions (mm)	L: 505 x W: 140 x D: 380 mm
Outer Carton Gross Weight (kg)	9.8 kg

