



COMET

SLIM FLOODLIGHTS

The Comet floodlight offers a comprehensive range of outputs. This versatility, combined with a choice of PIR and Photocell options pre-wired cable and U shaped mounting bracket makes Comet an extremely cost effective outdoor solution.



Features

- IP65
- IK07
- 3 Year Warranty
- U shaped Mounting Bracket
- Glass Front

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
CMT200-40	Comet Floodlight 200W 20000lm 4000K IP65 Black	20000lm		200W	100 lm/W

Product Information

Warranty	3 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Voltage	220-240V
Material (Body/Housing)	Aluminum
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra >80

Colour Finish	Black RAL9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 45°C





COMET

SLIM FLOODLIGHTS

Packaging Information

Dimensions (mm)	L: 414 x W: 374 x D: 41 mm
Product Net Weight (kg)	3.09 kg
Barcode	5055807625654
Box Dimensions (mm)	L: 424 x W: 50 x D: 320 mm
Box Gross Weight (kg)	3.3 kg

Units/Outer Carton	4
Outer Carton Barcode	15055807625651
Outer Carton Dimensions (mm)	L: 440 x W: 220 x D: 340 mm
Outer Carton Gross Weight (kg)	13.8 kg

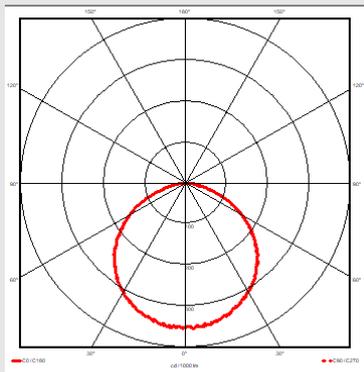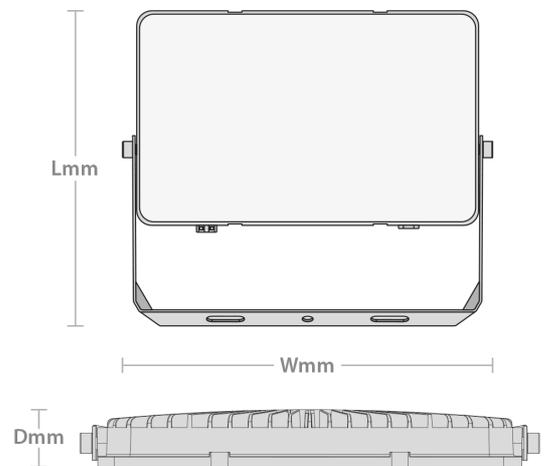

ENERGY
Red Arrow
 CMTXXX-40

A
 B
 C
 D
 E
 F
 G

10-300
 kWh/1000h