



COMET PHOTOCELL

SLIM FLOODLIGHTS WITH PHOTOCELL

The Comet floodlight offers a comprehensive range of outputs. This versatility, combined with a choice of PIR and Photocell options pre-wired cable and U shaped mounting bracket makes Comet extremely cost effective.



Features

- IP65
- IK07
- 3 Year Warranty
- U shaped Mounting Bracket
- Photocell

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
CMT100PC-40	Comet Floodlight 100W 10000lm c/w Photocell 4000K IP65 Black	10000lm		100W	100 lm/W

Product Information

Warranty	3 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Voltage	220-240V
Material (Body/Housing)	Aluminum
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra >80

Colour Finish	Black RAL9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 45°C





COMET PHOTOCELL

SLIM FLOODLIGHTS WITH PHOTOCELL

Packaging Information

Dimensions (mm)	L: 290 x W: 251 x D: 37 mm
Product Net Weight (kg)	1.475 kg
Barcode	5055807625715
Box Dimensions (mm)	L:300 x W: 45 x D: 218 mm
Box Gross Weight (kg)	1.6 kg

Units/Outer Carton	4
Outer Carton Barcode	15055807625712
Outer Carton Dimensions (mm)	L: 325 x W: 200 x D: 245 mm
Outer Carton Gross Weight (kg)	6.8 kg

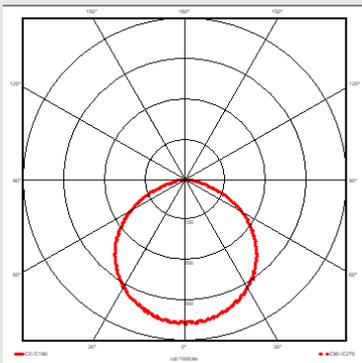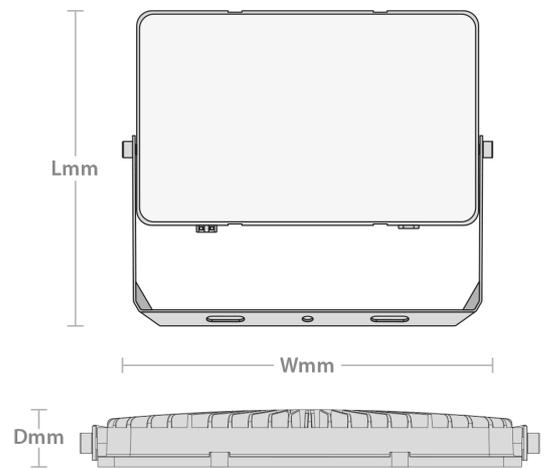

ENERGY
Red Arrow
 CMTXXX-40

A
 B
 C
 D
 E
F
 G

10•300
 kWh/1000h